


PLAN VIEW

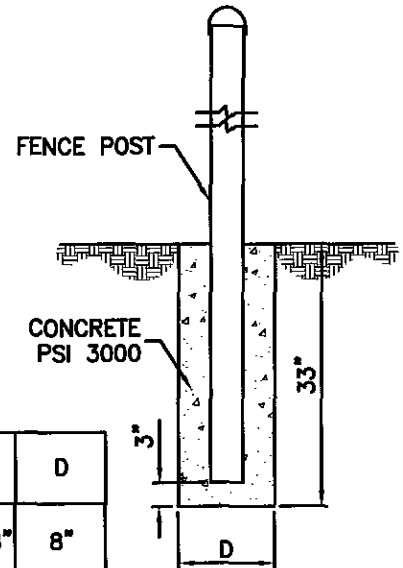

FOOTING VIEW

	POST O.D.	D
END POST	2 7/8"	8"
GATE POST	4"	10"

NOTES

1. ALL CHAIN LINK SHALL BE NO 9 GAUGE GALVANIZED COMMERCIAL GRADE.
2. DITCH PANEL SHALL BE FRAMED WITH 1 5/8" SCHD 40 RAILS TOP AND BOTTOM
3. DITCH PANEL SHALL BE SET TO MAINTAIN 3" MINIMUM CLEARANCE TO THE CONCRETE DITCH LINER. SIDE PANELS SHALL BE SET TO MAINTAIN 3" MINIMUM CLEARANCE TO FINISHED GRADE. TOP OF FENCE SHALL BE UNIFORM FOR ENTIRE ENCLOSURE.
4. NO 9 GAUGE TENSION WIRE SHALL BE PROVIDED ON SIDE PANELS.
5. DIRECTION OF GATE SWING SHALL BE CONFIRMED WITH THE RWCD INSPECTOR PRIOR TO INSTALLATION.
6. PROVIDE MID BRACE AND TRUSS ROD AT ALL CORNERS AND END POSTS.
7. PROVIDE FORK LATCH ON GATE. LATCH SHALL BE PRE-DRILLED TO RECEIVE PADLOCK.

LAST UPDATED: 03/06/06

ROOSEVELT WATER CONSERVATION DISTRICT

HEADWALL ENCLOSURE